


PIN HEADER CONNECTOR



2.00mm DOUBALE ROW R/A ASSEMBLY

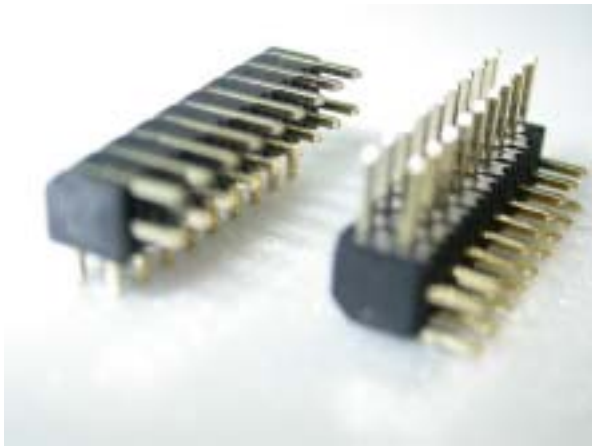


122R06-A01

MATERIALS :

INSULATOR: NYLON 6T COLOR BLACK UL94V-0
CONTACT : COPPER ALLOY.
PLATING: GOLD FLASH.

ELECTRICAL CHARACTERISTICS :

INSULATION RESISTANCE : 1000 MΩ MIN.
DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC
(R.M.S.)
CONTACT RESISTANCE: 20 MΩ MAX.

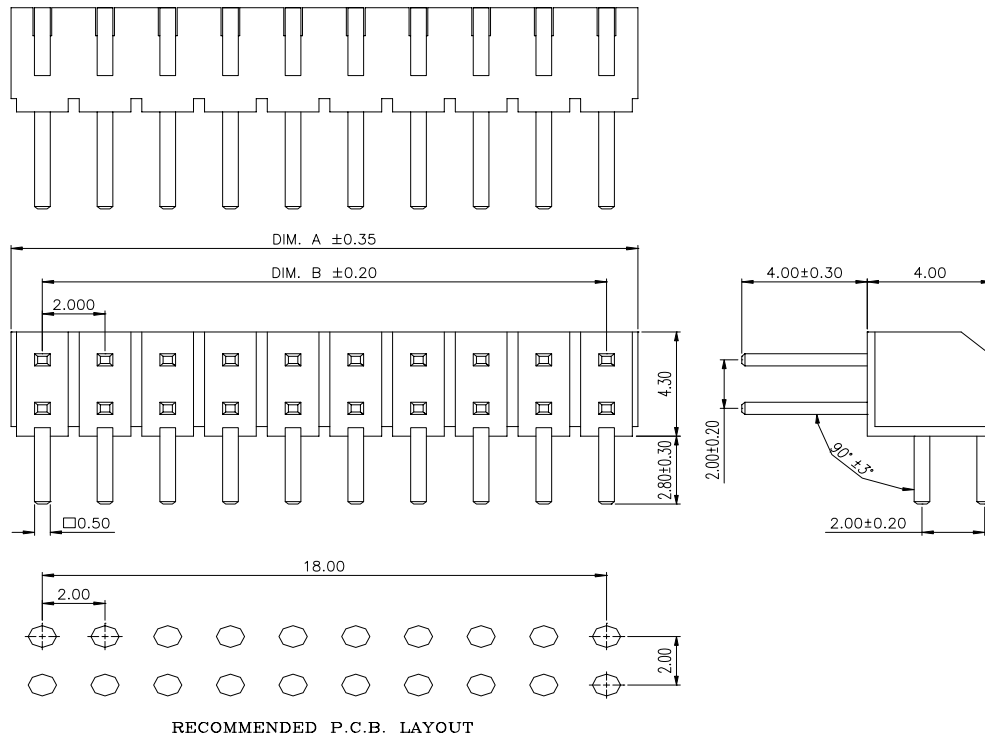

P/N	DIMENSIONS		P/N	DIMENSIONS		P/N	DIMENSIONS		P/N	DIMENSIONS	
	A	B		A	B		A	B		A	B
122R06-A01	6.00	4.00	122R26-A01	26.00	24.00	122R48-A01	46.00	44.00	122R68-A01	66.00	64.00
122R08-A01	8.00	6.00	122R28-A01	28.00	26.00	122R50-A01	48.00	46.00	122R70-A01	68.00	66.00
122R10-A01	10.00	8.00	122R30-A01	30.00	28.00	122R52-A01	50.00	48.00	122R72-A01	70.00	68.00
122R12-A01	12.00	10.00	122R32-A01	32.00	30.00	122R54-A01	52.00	50.00	122R74-A01	72.00	70.00
122R14-A01	14.00	12.00	122R34-A01	34.00	32.00	122R56-A01	54.00	52.00	122R76-A01	74.00	72.00
122R16-A01	16.00	14.00	122R36-A01	36.00	34.00	122R58-A01	56.00	54.00	122R76-A01	76.00	74.00
122R18-A01	18.00	16.00	122R40-A01	38.00	36.00	122R60-A01	58.00	56.00	122R78-A01	78.00	76.00
122R20-A01	20.00	18.00	122R42-A01	40.00	38.00	122R62-A01	60.00	58.00	122R80-A01	80.00	78.00
122R22-A01	22.00	20.00	122R44-A01	42.00	40.00	122R64-A01	62.00	60.00			
122R24-A01	24.00	22.00	122R46-A01	44.00	42.00	122R66-A01	64.00	62.00			