

SERIAL ATA CONNECTOR



PLUG 7 PIN , BILATERAL ARM 180°



PART NO. :

161S01-509

MATERIALS :

INSULATOR : LCP UL94V-0 , BLACK.

CONTACT : BRASS.

METAL BOARD LOCK : PHOSPHOR BRONZE, NICKEL PLATED.

CONTACT PLATING :

CONTACT AREA : 15 μ" GOLD FLASH OVER NICKEL

SOLDER TAIL : 100 μ" TIN/LEAD OVER NICKEL


ELECTRICAL CHARACTERISTICS :

CURRENT RATING : 1.5 AMP

INSULATION RESISTANCE : 1000M MIN.

DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC

CONTACT RESISTANCE : 30m MAX.

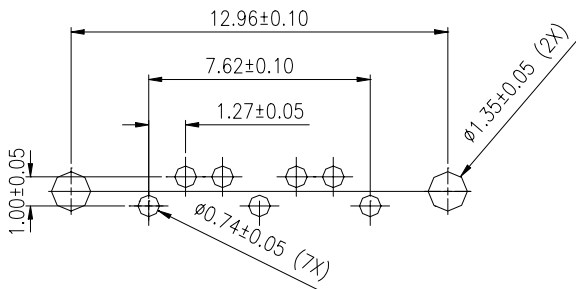

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

