

BOX HEADER CONNECTOR



2.54mm STRAIGHT




211S SERIES

MATERIALS :

INSULATOR: PBT+30%G.F. COLOR BLACK UL94V-0
CONTACT : COPPER ALLOY,
PLATING: GOLD PLATED OVER NICKEL.

ELECTRICAL CHARACTERISTICS :

VOLTAGE RATING: 250 VAC (R.M.S.)
CURRENT RATING: 2 AMP.
INSULATION RESISTANCE : 1000 MΩ MIN.
DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC (R.M.S.)
CONTACT RESISTANCE: 20 MΩ MAX.

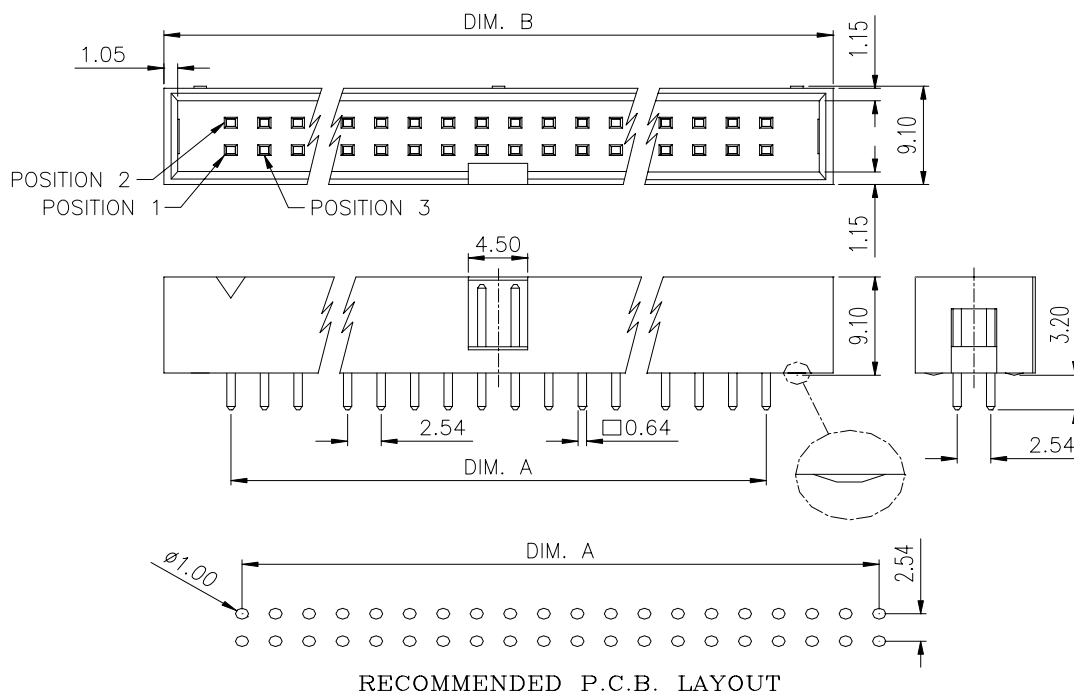

P/N	DIMENSIONS		P/N	DIMENSIONS	
	A	B		A	B
211S06-0	5.08	15.24	211S34-0	40.64	50.80
211S08-0	7.62	17.78	211S36-0	43.18	53.34
211S10-0	10.16	20.32	211S38-0	45.72	55.88
211S12-0	12.70	22.86	211S40-0	48.26	58.42
211S14-0	15.24	25.40	211S42-0	50.80	60.96
211S16-0	17.78	27.94	211S44-0	53.34	63.50
211S20-0	22.86	33.02	211S46-0	55.88	66.04
211S24-0	27.94	38.10	211S48-0	58.42	68.58
211S26-0	30.48	40.64	211S50-0	60.96	71.12
211S30-0	35.56	45.72	211S60-0	73.66	83.82
211S32-0	38.10	48.26	211S64-0	78.74	88.90