

FEMALE SOCKET CONNECTOR



2.00mm DOUBLE ROW STRAIGHT




222S SERIES

MATERIALS :

INSULATOR: PBT COLOR BLACK UL94V-0
 CONTACT : COPPER ALLOY..
 PLATING: GOLD PLATING ON TOP ALL OVER.

ELECTRICAL CHARACTERISTICS :

VOLTAGE RATING: 250 VAC (R.M.S.)
 CURRENT RATING: 1 AMP.
 INSULATION RESISTANCE : 2000 MΩ MIN.
 DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC (R.M.S.)

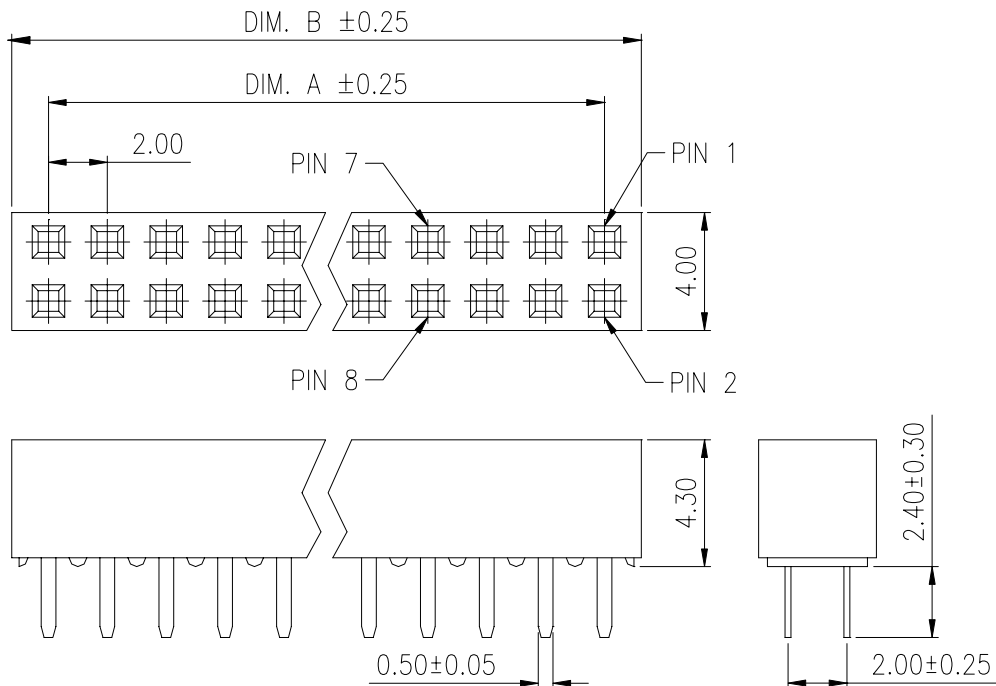

P/N	DIMENSIONS	
	A	B
222S20-0	18.00	20.50
222S26-0	24.00	26.50
222S32-0	30.00	32.50
222S34-0	32.00	34.50
222S40-0	38.00	40.50
222S44-0	42.00	44.50
222S50-0	48.00	50.50
222S80-0	78.00	80.50