

D-SUB CONNECTOR



0.350" H/D 15P RECEPTACLE R/A





312S15 SERIES

MATERIALS :

INSULATOR: PBT +30%G.F. UL94V-0
 CONTACT : PHOSPHOR BRONZE.
 PLATING: GOLD PLATED ON CONTACT AREA & 120u".
 MIN TIN/ LEAD PLATED ON SOLDERING
 END OVER 30u" OR 50u" NICKEL
 UNDER-PLATING.
 SHELL: STEEL WITH NICKEL PLATING.
 BOARDLOCKS: BRASS WITH TIN/LEAD PLATED ON
 SOLDERING END OVER NICKEL
 UNDER-PLATING.

ELECTRICAL CHARACTERISTICS :

CURRENT RATING: 2 AMP. MAX.
 INSULATION RESISTANCE : 1000 MEGOHMS MIN.
 DIELECTRIC STRENGTH: 1000 VAC (R.M.S)
 FOR 1 MINUTE.
 CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM.

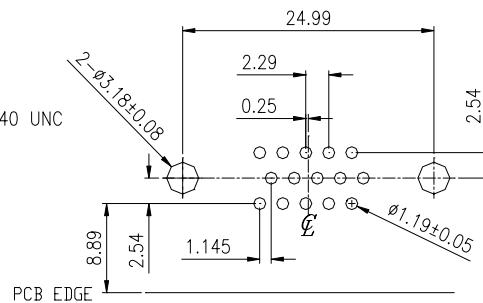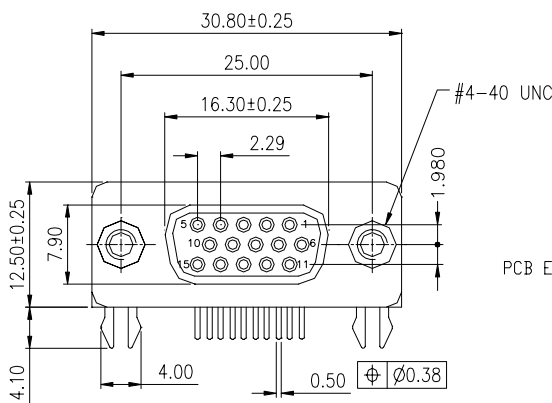

RECOMMENDED P.C.B LAYOUT
(VIEW FROM TOP SIDE)

