

D-SUB CONNECTOR

9 MALE DUAL PORT



PART NO. :





313P09-002G

MATERIALS :

CONTACT : BRASS.
CONTACT PLATING : TIN OR GOLD PLATED.
RIVET & SCREW: BRASS, NICKEL PLATED.

ELECTRICAL CHARACTERISTICS :

CURRENT RATING: 1 AMP.
INSULATION RESISTANCE : 1000 MEGOHMS MIN AT
500V DC.
DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC
CONTACT RESISTANCE : 20 MILLIOHMS MAX. AT 6V
DC 0.3 AMP.

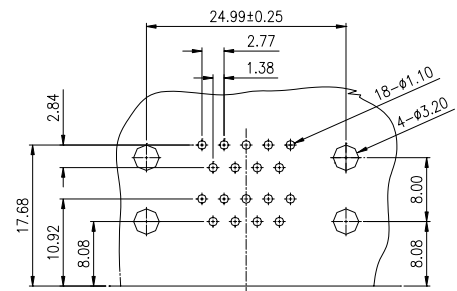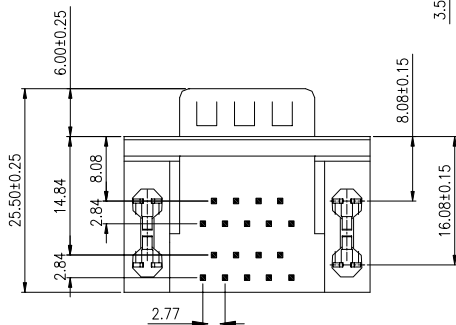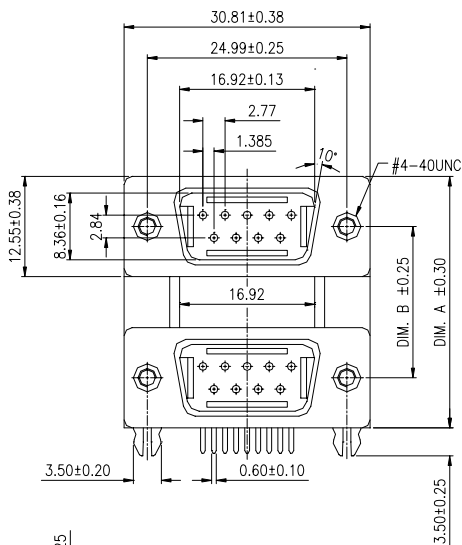

RECOMMENDED P.C.B. LAYOUT
BOTTOM VIEW