

POWER CONNECTOR



4.20mm R/A W/O POST




821R SERIES

MATERIALS :

INSULATOR: NYLON 66 UL94V-0.
CONTACT: COPPER ALLOY.
PLATING: 100u" MIN. TIN/ LEAD OVER NICKEL

ELECTRICAL :

VOLTAGE RATING : 250 VAC (R.M.S.)
CURRENT RATING : 5 AMP.
INSULATION RESISTANCE: 1000 mΩ MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC (R.M.S.)

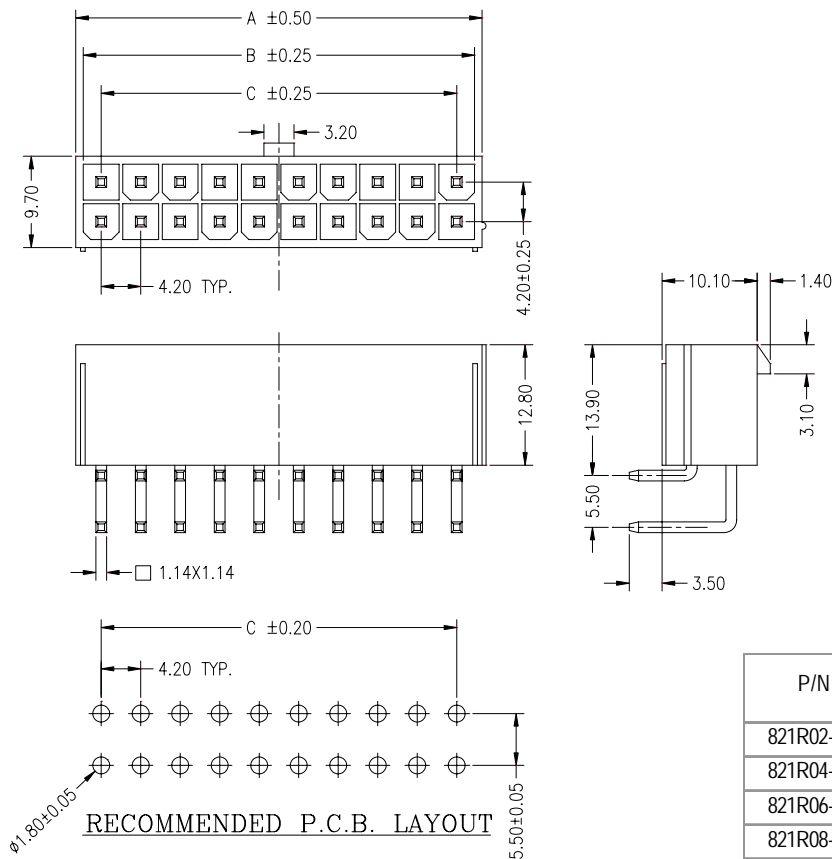

P/N	DIMENSIONS		
	A	B	C
821R02-801	5.40	3.80	0.00
821R04-801	9.60	8.00	4.20
821R06-801	13.80	12.20	8.40
821R08-801	18.00	16.40	12.60
821R10-801	22.20	20.60	16.80
821R12-801	26.40	24.80	21.00
821R14-801	30.60	29.00	25.20
821R16-801	34.80	33.20	29.40
821R18-801	39.00	37.40	33.60
821R20-801	43.20	41.60	37.80
821R22-801	47.40	45.80	42.00
821R24-801	51.60	50.00	46.20