

# POWER CONNECTOR



## 4.20mm STRAIGHT W/POST




### 821S SERIES

#### **MATERIALS :**

INSULATOR: GLASS REINFORCED THERMOPLASTIC.  
CONTACT: BRASS.  
PLATING: TIN PLATED 120u" MIN. OVER 30u" NICKEL.

#### **ELECTRICAL :**

CONTACT RESISTANCE: 20mΩ MAX.  
INSULATION RESISTANCE: 1000 mΩ MIN.  
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VAC  
(R.M.S.)

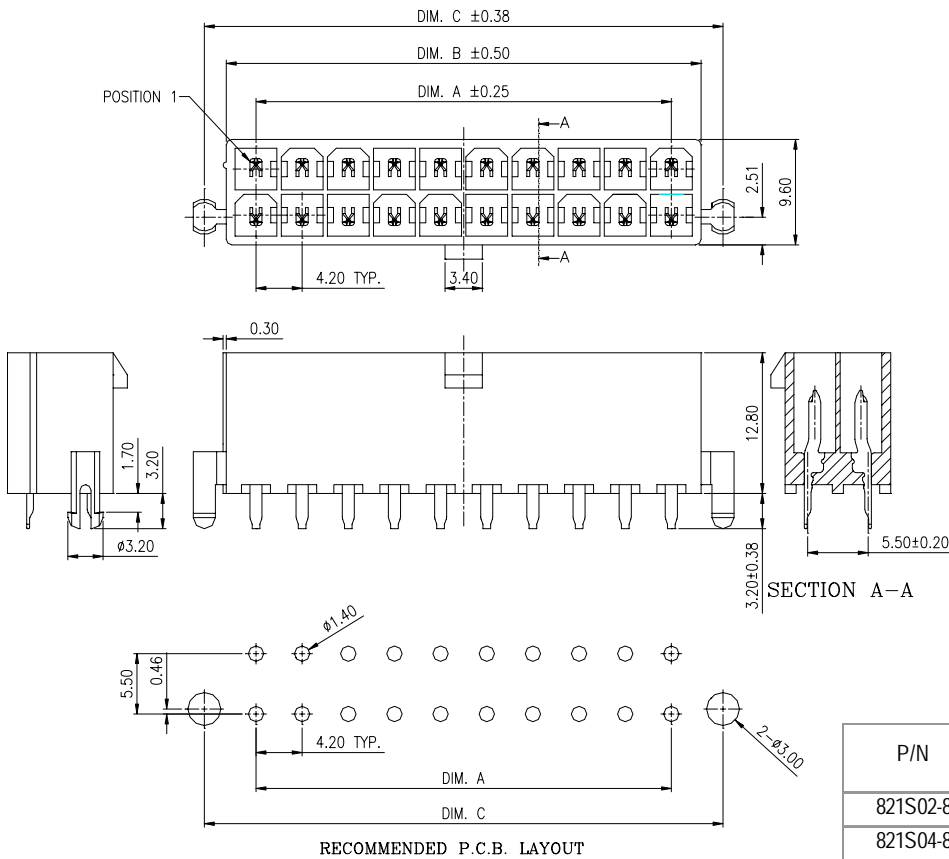

P/N	DIMENSIONS		
	A	B	C
821S02-8	0.00	5.40	9.40
821S04-8	4.20	9.60	13.60
821S06-8	8.40	13.80	17.80
821S08-8	12.60	18.00	22.00
821S10-8	16.80	22.20	26.20
821S12-8	21.00	26.40	30.40
821S14-8	25.20	30.60	34.60
821S16-8	29.40	34.80	38.80
821S18-8	33.60	39.00	43.00
821S20-8	37.80	43.20	47.20
821S22-8	42.00	47.40	51.40
821S24-8	46.20	51.60	55.60